

For information about other American International automotive accessories visit our website at:

<http://www.aius.net>



**American  
International**  
*Car Stereo Installation Kits & Accessories*



**HONK814** Mounting Kit



**American International**

2500 East Francis Street Ontario, CA 91761, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

#### VEHICLE APPLICATIONS

**Honda**

2003-05 PILOT (upper dash radio location)

2006-08 PILOT EX (upper dash radio location)

**CUSTOMER HELP LINE**

**USA 800-323-4329 • Canada 800-245-8777**

iHONK814

©2014 AMERICAN INTERNATIONAL INDUSTRIES, INC.

TECH Ver. 10/14 PRINT Ver. 10/14

## DASH DISASSEMBLY INSTRUCTIONS

- Carefully pry outward on the trim bezel from around the radio.  
NOTE: There are 4 panel clips holding the factory trim bezel in place, (2) are located 1/2 inch down from the top on each side of the trim bezel, (2) are located 1 inch in from each corner on the bottom of the trim bezel. There are cut-out slots on the trim bezel at each of these locations to allow a thin flat-blade screwdriver to pry outward on the trim bezel.
- Disconnect the harnesses from the trim bezel and remove bezel.
- Remove the (4) phillips screws securing the radio to the sub-dash.
- Carefully pull radio forward, disconnect the wire harnesses and antenna lead and remove radio.


### 2006-08 HONDA PILOT EX

## DASH DISASSEMBLY INSTRUCTIONS

- Remove the (2) phillips screws located above the instrument gauges, Lower the steering column down and carefully pry the instrument gauge trim panel forward and remove trim.
- Engage the parking brake and put the key in the ignition, turn the key to the on position and depress the brake pedal and lower the shift lever down.
- Remove the Trim panel located to the left of the radio/vent bezel.
- Carefully pry the radio/Vent trim bezel forward, disconnect the attached harnesses and remove bezel.
- Remove the (4) phillips screws securing the radio to the sub-dash, pull radio forward, disconnect all harnesses and antenna lead and remove radio.

## KIT ASSEMBLY INSTRUCTIONS

FOR DIN, ISO & SHAFT RADIO APPLICATIONS

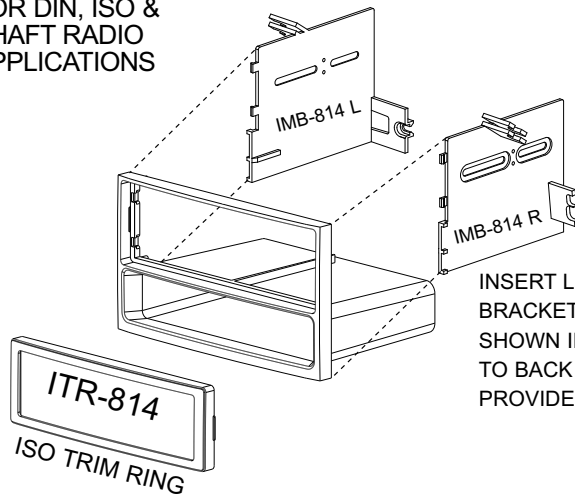

INSERT LEFT AND RIGHT MOUNTING BRACKETS INTO RADIO OPENING AS SHOWN IN ILLUSTRATION AND SECURE TO BACK OF POCKET USING SCREWS PROVIDED

Use Fig. A for 2006 Pilot bracket configuration  
Use Fig. B for 2003-05 Pilot bracket configuration

### 2006-08 HONDA PILOT EX Fig. A (remove front tabs)





Fig. A

REMOVE ONLY SHADED TABS ON BOTH LEFT & RIGHT BRACKETS FOR YOUR VEHICLE YEAR

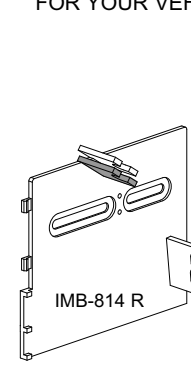

IMB-814 R

### 2003-2005 HONDA PILOT Fig. B (remove back tabs)






Fig. B




IMB-814 R

## DIN MOUNT INSTALLATION INSTRUCTIONS

- Insert DIN sleeve from your new radio into the radio opening of the installation kit.
- Depress the tabs from inside the sleeves opening upward, outward, and downward to secure sleeve to the installation kit.
- Insert radio into DIN sleeve and secure to back of pocket with backstrap (not included).

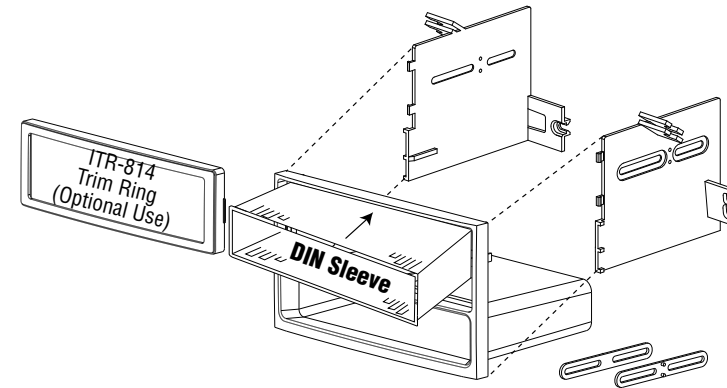

## ISO MOUNT INSTALLATION



INSERT SPACERS INTO BRACKETS ON BOTH SIDES ONLY WHEN ISO MOUNTING RADIO (ISO MOUNT HARDWARE INCLUDED)