


For information about other American International automotive accessories visit our website at:

<http://www.americaninternational.net>



**American
International**
Car Stereo Installation Kits & Accessories

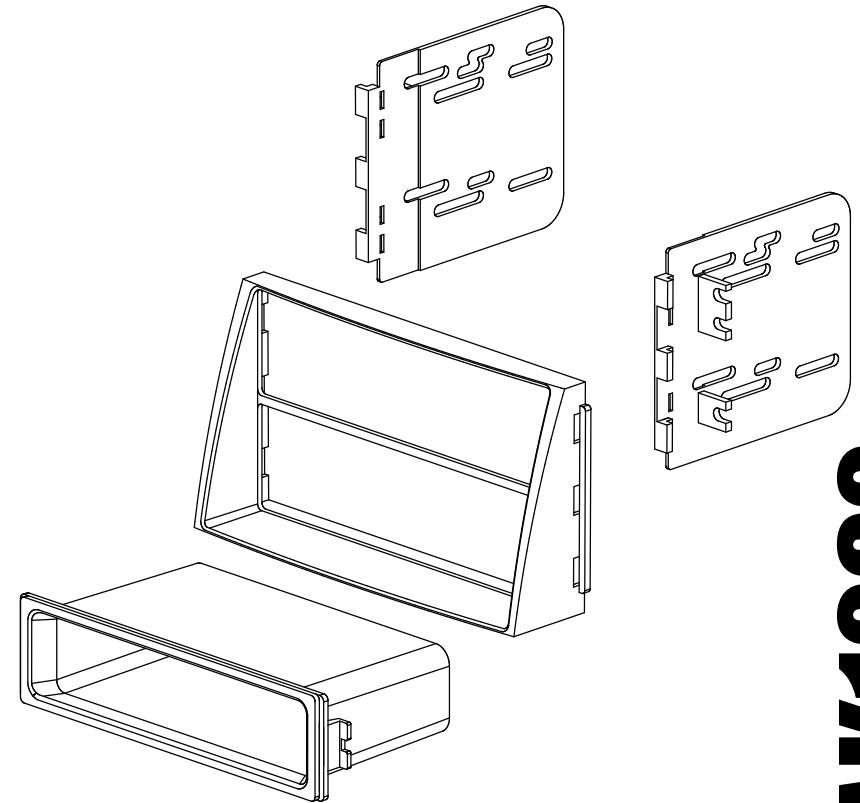

KIAK1262 Mounting Kit



American International

Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777

iKIAK1262

VEHICLE APPLICATIONS

Kia

2010-11 SOUL


DASH DISASSEMBLY

1. Starting from the lower edge of the Radio/Climate control trim bezel, carefully pry upward from the small slot at the base of the trim bezel to release the retaining clips. (THE CLIPS ARE VERY TIGHT).
2. Carefully working your way to the top, unclip the entire Radio/ Climate control trim bezel, disconnect the hazard switches harness and remove bezel.
3. Remove the (4) Phillip's screws securing the radio to the sub-dash.
4. Remove the (4) Phillip's screws securing the climate controls and set the controls out of the way.
5. Carefully pull the radio forward, disconnect all attached harnesses and antenna lead and remove radio.

KIT ASSEMBLY INSTRUCTIONS


Single ISO Mount Applications

1. This kit is an (ISO) mounting kit only.
2. The mounting sleeve of your new radio and trim ring cannot be used when ISO mounting an aftermarket radio. Your radio must have a removeable trim ring.
3. Insert left and right mounting brackets to rear of kit as shown in Figure A.
4. Insert pocket into lower section of kit from rear & lock into slots of mounting brackets.
5. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or screws supplied with kit.
6. Slide radio forward or backward for desired look and tighten screws.

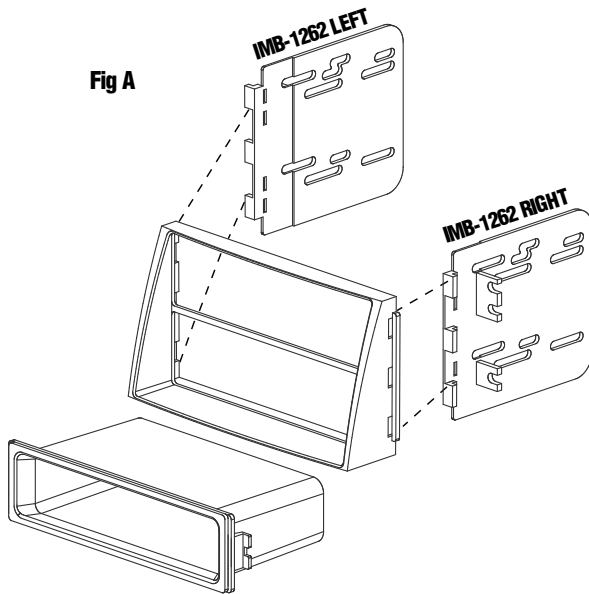

Double ISO Mount Applications

1. This kit is an (ISO) mounting kit only.
2. The mounting sleeve of your new audio/video components and trim ring cannot be used when ISO mounting an aftermarket radio. Your audio/video components must have a removeable trim ring.
3. Insert left and right mounting brackets to rear of kit as shown in Figure B.
4. Insert ISO mountable audio/video components between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or screws supplied with kit.
5. Slide audio/video components forward or backward for desired look and tighten screws.
6. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.

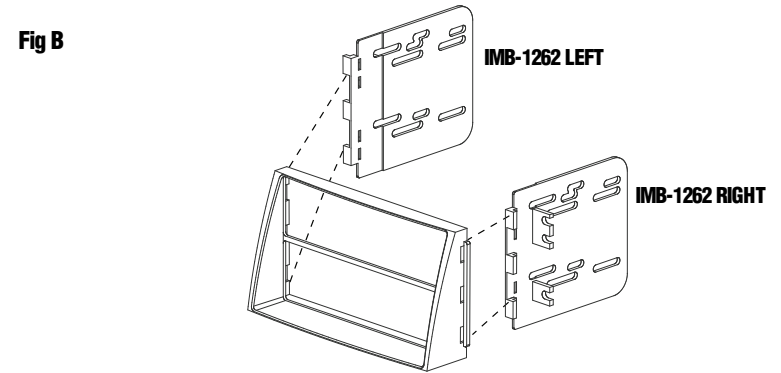

Double DIN Mount Applications

1. Cut out the center rib of the main fascia & file edges smooth as shown in Figure C.
2. Insert IMB-1262 L&R into rear of kit.
3. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or hardware included with kit.
4. Slide radio component forward or backward for desired look and tighten screws.
5. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.

