For information about other American International automotive accessories visit our website at:

http://www.aius.net




WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A. USA Sales (800) 336-6500 Canada Sales (888) 922-3006

CUSTOMER HELP LINEUSA 800-323-4329 • Canada 800-245-8777



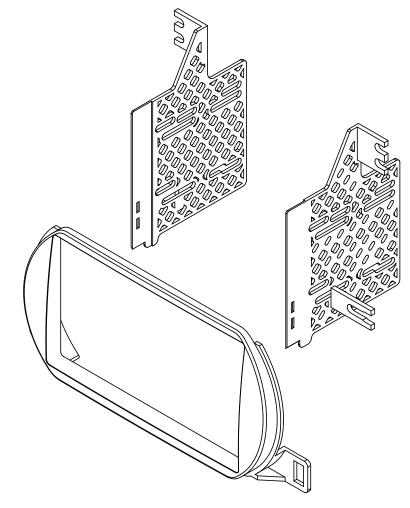

VEHICLE APPLICATIONS

Nissan

2002-04 ALTIMA

TECH Ver. 10/12 PRINT Ver. 01/15


DASH DISASSEMBLY INSTRUCTIONS

- Carefully remove the trim ring from around the Climate Controls, disconnect the Defroster harness and remove trim.
- 2. Remove the (1) Phillips screw from the lower right edge of the Radio dash trim bezel.
- 3. Carefully lift upward from the bottom of the radio trim bezel, pull Radio trim bezel forward and remove.
- 4. Remove the (4) Phillips screws securing the factory radio to the sub-dash.
- 5. Pull Radio forward, disconnect all harnesses and antenna lead from radio and remove radio.

DOUBLE DIN MOUNT INSTALLATION INSTRUCTIONS

- 1. Insert radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or hardware included with kit.
- 2. Align NDK705 mainframe opening with the face of double din radio.
- 3. Slide radio component forward or backward for desired look and tighten screws.
- 4. SUGGESTED... Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.

Fig. A

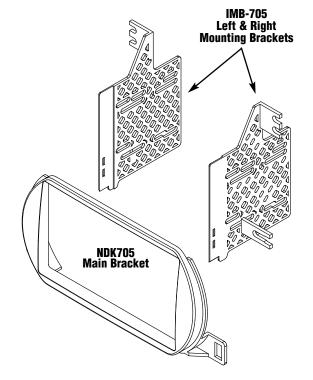

MU1E2		
-		