


For information about other American International automotive accessories visit our website at:

<http://www.aius.net>



**American
International**
Car Stereo Installation Kits & Accessories

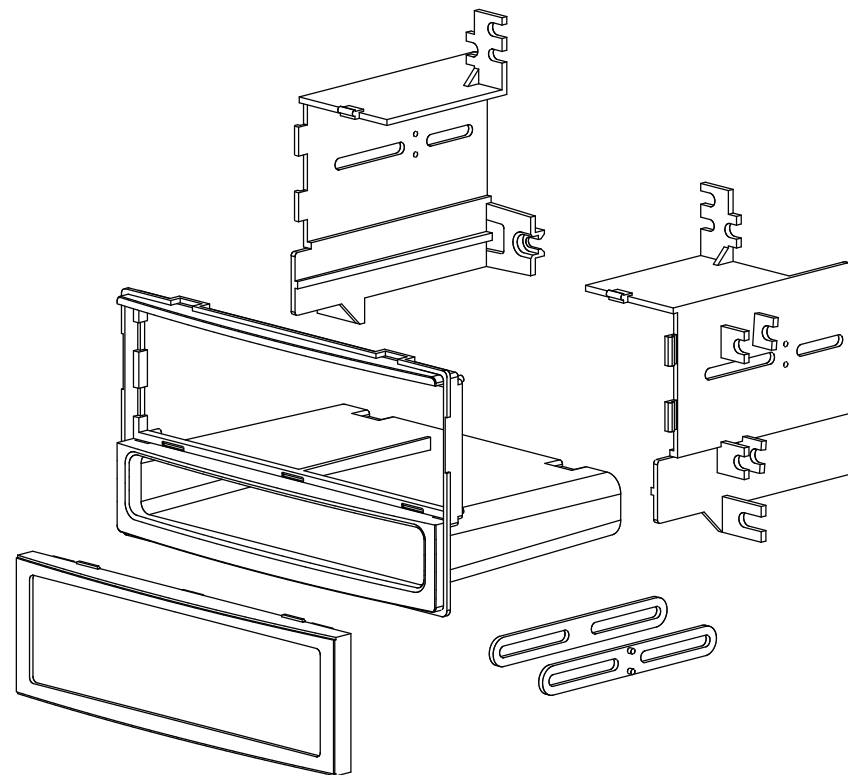

HYNK1120 Mounting Kit



American International

2500 East Francis Street Ontario, CA 91761, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006

VEHICLE APPLICATIONS

Hyundai

2006-11 ACCENT

Kia

2006-11 RIO

2007-10 SORENTO

2005-10 SPORTAGE

CUSTOMER HELP LINE

USA 800-323-4329 • Canada 800-245-8777


iHYNK1120

ISO MOUNT INSTALLATION INSTRUCTIONS

NOTE: Some radio faces are larger in size than the ITR1120 Trim Ring allows. You may need to file the Trim Ring opening larger for some radios.

1. See page 3 for Bracket Preparation.
2. Attach the left and right side brackets to the main bracket. See illustration below.
3. Attach left and right side brackets to the rear of the pocket using screws supplied w/kit.
4. Attach ISO Mount Spacers to the inside of upper section on both Left & Right mounting brackets as shown in Figure A below.
5. Slide radio into kit from rear & attach to ISO mounting brackets using screws supplied with radio (do not tighten screws at this time). (Be sure the length of the screws DO NOT touch any electrical parts inside radio, some screws may need to be shortened.)
6. Slide radio forward or backward for your desired look and then tighten the mounting screws. Use ISO trim ring when possible.
7. Attach rear support strap (supplied with radio) to rear of pocket and to rear of radio.

NOTE: Optional ISO trim ring (ITR1120 included) may be used in place of after-market radio's trim ring. For ISO mount applications, mount after-market radio to side brackets using hardware included.

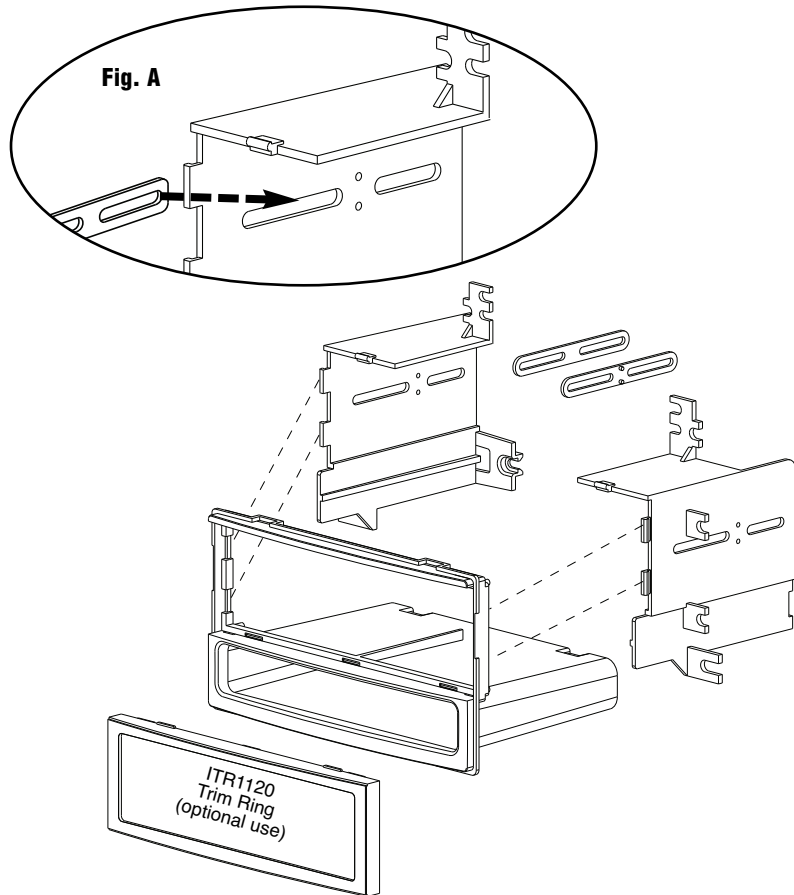

2007-10 KIA SORENTO

DASH DISASSEMBLY

1. Carefully pry outward and remove the individual side trims located beside the Climate controls and storage pockets.
2. Remove the (2) Phillips screws securing the Radio trim bezel.
3. Carefully unclip and pull forward the radio trim bezel, disconnect all attached harnesses and remove radio trim bezel.
4. Remove the Individual screw securing each left and right vents/trim panel, carefully pull the panels forward and remove.
5. Remove the (4) Phillips screws securing the radio to the sub-dash, pull radio forward and disconnect all harnesses and antenna lead and remove radio.

BRACKET PREPARATION

KIA SORENTO

