
For information about other American International automotive accessories visit our website at:

http://www.aius.net





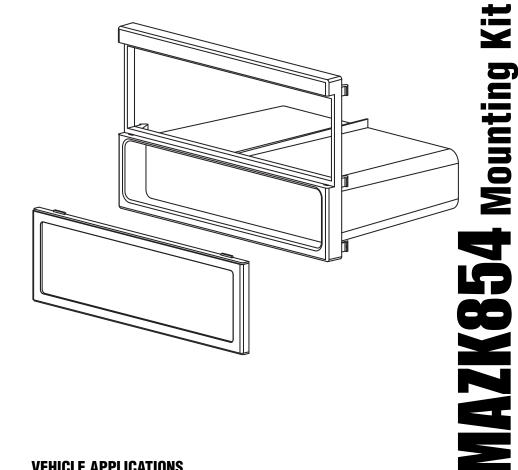

WWW.AIUS.NET

2500 East Francis Street Ontario, CA 91761, U.S.A. USA Sales (800) 336-6500 Canada Sales (888) 922-3006

VEHICLE APPLICATIONS

Mazda

2001-02 626

2001-05 Miata/MX-5

2000-02 Millenia

2001-03 Protege

2001-03 Protege 5

2001-06 Tribute

2001-02 MAZDA 626 2001-05 MAZDA MIATA/MX-5 2000-02 MAZDA MILLENIA 2001-03 MAZDA PROTEGE 2001-03 MAZDA PROTEGE 5 2001-06 MAZDA TRIBUTE

DASH DISASSEMBLY INSTRUCTIONS

- 1. Carefully pry outward on the individual beauty trim pieces on each side edge of the factory radio and remove.
- 2. Using (2) pairs of Ford/Mazda radio removal tools (part#URT-460), insert the (4) individual tools into the radio release holes on the edges of the face of the factory radio.

NOTE: You must angle these keys into the holes so the keys are slightly angled in towards each other just enough to get the keys on the outside of the spring clips and so they click into the locked position.

CAUTION: If the keys are not inserted correctly, damage to the radio may occur or you may not be able to remove the radio if the retaining clips have been spread apart to far.

- 3. Carefully pry all (4) radio removal keys outward at the same time and pull towards you to release the factory radio.
- 4. Disconnect the wire harness and antenna lead and remove radio.


DIN MOUNT INSTALLATION INSTRUCTIONS


 Insert DIN sleeve from your new radio into the radio opening of the installation kit and depress the tabs to secure sleeve to kit.

NOTE: Do not depress side tabs until after kit is installed in the dash

2. Install kit into dash opening making sure all mounting tabs on kit are locked in place (See Figure A on page 3).

Fig.A

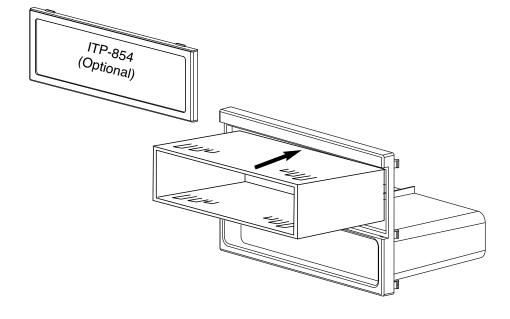

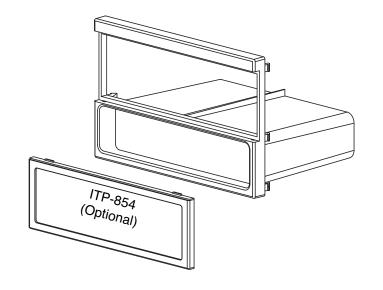

2